



# Technical Data Sheet

3M™ Low VOC Tape 99015LVC



[Product Details](#)




[Regulatory Info/SDS](#)

## Product Description

3M™ Low VOC Tapes with Acrylic Adhesive 98010LVC and 99015LVC are designed for automotive interior applications on commonly used foam substrates, such as PU Ester and EPDM, as well as high surface energy (HSE) substrates. The pure acrylic adhesive on both thin bonding tapes is designed to be low fog and low emission to meet the VOC requirements set forth in the JAMA and VDA278 test methods used by Automotive OEM's and tier suppliers.

98010LVC is a 3.9 mil (0.10 mm) low VOC scrim reinforced transfer tape that provides good dimensional stability for large area lamination. 99015LVC is a 5.9 mil (0.15 mm) low VOC double coated tape with tissue carrier for ease of handling during lamination and excellent die-cutting characteristic.

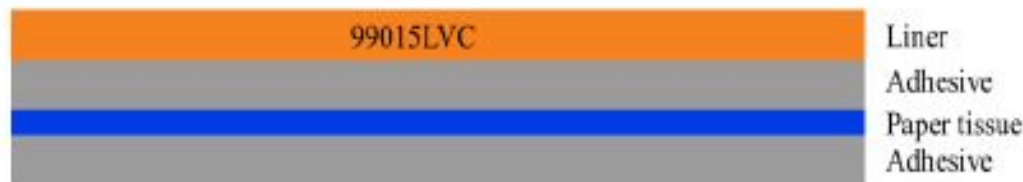

## Technical Information Note

The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

## Typical Physical Properties

Attribute Name	Test Method	Value
Adhesive Type		Acrylic
Total Tape Thickness	ASTM D3652	0.15 mm (5.9 mil)
Liner		58# Densified Kraft
Liner Print		Low VOC
Liner Thickness		0.08 mm (3.2 mil)
Primary Liner Color		White with red print

## Typical Performance Characteristics

### 180° Peel Adhesion

Backing: 2 mil Aluminum Foil

Test Method: ASTM D3330

Dwell Time	Temperature	Substrate	Value
20 min	23 °C (73 °F)	ABS	13 N/cm (120 oz/in) <sup>1</sup>
20 min	23 °C (73 °F)	Polycarbonate (PC)	14 N/cm (130 oz/in) <sup>1</sup>
20 min	23 °C (73 °F)	Polypropylene (PP)	2.6 N/cm (24 oz/in) <sup>1</sup>
20 min	23 °C (73 °F)	Stainless Steel	13 N/cm (120 oz/in) <sup>1</sup>
72 h	70 °C (158 °F)	ABS	14 N/cm (130 oz/in) <sup>1</sup>
72 h	70 °C (158 °F)	Polycarbonate (PC)	14 N/cm (130 oz/in) <sup>1</sup>
72 h	70 °C (158 °F)	Polypropylene (PP)	2.7 N/cm (25 oz/in) <sup>1</sup>
72 h	70 °C (158 °F)	Stainless Steel	12 N/cm (110 oz/in) <sup>1</sup>

<sup>1</sup> 304 mm/min (12 in/min)

### 90° Peel Adhesion

Backing: 2 mil Aluminum Foil

Test Method: ASTM D3330

Dwell Time	Temperature	Substrate	Value
20 min	23 °C (73 °F)	ABS	2.0 N/cm (18 oz/in) <sup>1</sup>
20 min	23 °C (73 °F)	Polycarbonate (PC)	9.5 N/cm (87 oz/in) <sup>1</sup>
20 min	23 °C (73 °F)	Polypropylene (PP)	2.6 N/cm (24 oz/in) <sup>1</sup>
20 min	23 °C (73 °F)	Stainless Steel	6.0 N/cm (55 oz/in) <sup>1</sup>
72 h	70 °C (158 °F)	ABS	7.3 N/cm (67 oz/in) <sup>1</sup>
72 h	70 °C (158 °F)	Polypropylene (PP)	2.1 N/cm (19 oz/in) <sup>1</sup>
72 h	70 °C (158 °F)	Stainless Steel	14 N/cm (130 oz/in) <sup>1</sup>

<sup>1</sup> 304 mm/min (12 in/min)

Temperature: 70 °C (158 °F)

Attribute Name	Test Method	Value
Static Shear	ASTM D3654	10,000 min <sup>1</sup>

<sup>1</sup> 25 x 25 mm (1 in x 1 in) sample area, test terminated after 10,000 minutes

Attribute Name	Value
Short Term Temperature Resistance	121 °C (250 °F) <sup>1</sup>
Long Term Temperature Resistance	93 °C (200 °F) <sup>2</sup>

<sup>1</sup> Short Term (minutes, hour)

<sup>2</sup> Long Term (day, weeks)

Attribute Name	Value
Note	Calipers are nominal values

## Typical Environmental Performance

### Fogging (Photometric method)

Test Method: SAEJ1756

Dwell Time	Value
1 h	97 % <sup>1</sup>
16 h	98 % <sup>1</sup>

<sup>1</sup> Fogging condensate on the glass plate determined by measuring the 60o specular gloss. The 60o specular gloss for the same glass plate is used as a reference value. The higher value indicates less fogging.

## **Handling/Application Information**

### **Application Examples**

- Automotive interior bonding
- Door trim and door bolster attachment
- Foam, flock and felt for BSR applications
- Gaskets and seals
- Headliner component and shade attachment
- Acoustic/Thinsulate™ attachment

### **Storage and Shelf Life**

Store under normal conditions of 16° to 27°C (60° to 80°F) in the original, unopened packaging, out of direct sunlight. For best performance, use this product within 24 months from date of manufacture.

### **Available Sizes**

Attribute Name	Value
Master Width	1000, 1372, 1500 mm (39, 54, 59 in) <sup>1</sup>

<sup>1</sup> More sizes may be available. Please talk to your local 3M representative for more information.

### **Automotive Disclaimer**

#### **Select Automotive Applications:**

This product is an industrial product and has not been designed or tested for use in certain automotive applications, such as automotive electric powertrain battery or high voltage applications, which may require the product to be manufactured in a IATF certified facility, meet a Ppk of 1.33 for all properties, undergo an automotive production part approval process (PPAP), or fully adhere to automotive design or quality system requirements (e.g., IATF 16949 or VDA 6.3). Customer assumes all responsibility and risk if customer chooses to use this product in these applications.

## **Information**

**Technical Information:** The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.

**Product Selection and Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

**Warranty, Limited Remedy, and Disclaimer:** Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

**Disclaimer:** 3M industrial and occupational products are intended, labeled, and packaged for sale to trained industrial and occupational customers for workplace use. Unless specifically stated otherwise on the applicable product packaging or literature, these products are not intended, labeled, or packaged for sale to or use by consumers (e.g., for home, personal, primary or secondary school, recreational/sporting, or other uses not described in the applicable product packaging or literature), and must be selected and used in compliance with applicable health and safety regulations and standards (e.g., U.S. OSHA, ANSI), as well as all product literature, user instructions, warnings, and limitations, and the user must take any action required under any recall, field action or other product use notice. Misuse of 3M industrial and occupational products may result in injury, sickness, or death. For help with product selection and use, consult your on-site safety professional, industrial hygienist, or other subject matter expert. For additional product information, visit [www.3M.com](http://www.3M.com).

## **ISO Statement**

This product was manufactured under a 3M quality system registered to ISO 9001 standards.

3M™ Industrial Adhesives and Tapes Division  
3M Center, St. Paul, MN 55144-1000  
[3M.com/iatd](http://3M.com/iatd)

3M and Thinsulate are trademarks of 3M Company  
©3M 2024 (9/24)